
Smun
XIMENG ELECTRIC

Non-Isolated DC/DC Converter Specification

Model No.:SDS-24S4810

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
18-36V DC	48V DC	10 Amps	480 Watts	97.3%	100*80*39mm

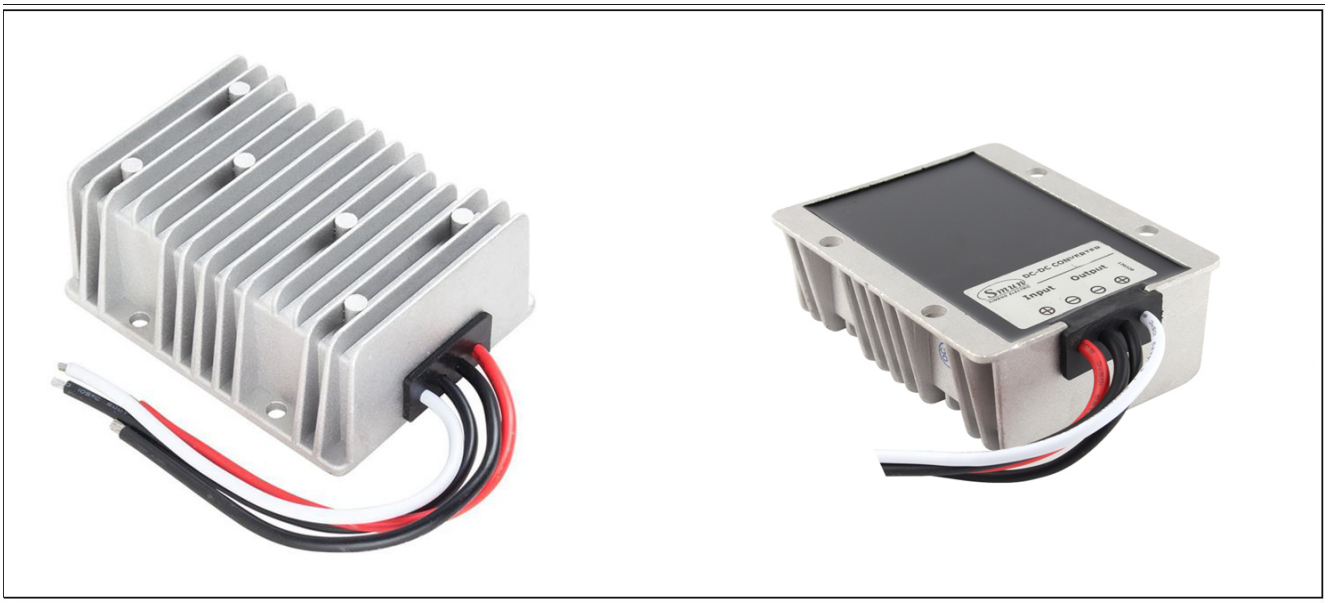

The SDS-24S4810 is an Non-isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 100mm x 80mm x 39mm and provides the rated output voltage of 48V and the maximum output current of 10 A.

Features

- High efficiency: 97.3% (@ 24Vin, 25℃)
- Design meeting CE/RoHS
- Input transient absorption protection
- Support -40 ° C environment
- 100% full load burn-in test
- Over load, Over temperature protections
- Waterproof level IP68
- 1 Years warranty

Applications

- Industrial
- Alternative Energy
- Golf Cart & Forklift
- Military
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical and so on.

Model naming method

SDS-24S4810

SDS : Step up type
24 : Input rated voltage
S : Single output type
48 : Output voltage
10 : Output current

Electrical Specifications

Conditions: TA = 25 ° C (77° F), Airflow = 1 m/s (200LFM), Vin =24V, Vout =48V , unless otherwise specified.

Parameter	Min.	Typ.	Max.	Units	Remarks
Absolute maximum ratings					
Operating ambient temperature	-40	-	+50	° C	
Shell ambient temperature	-40	-	80	° C	
Storage temperature	-55	-	100	° C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling
Input characteristics					
Input voltage	18	24	36	V	-
Max. input voltage	-	-	40	V	Continuous
Undervoltage shutdown	9.2	9.6	10	V	Automatic recovery
Undervoltage recovery	9.6	10.2	10.6	V	Automatic recovery
Max. input current	-	-	28	A	Vin =18V; Iout =10A
No load current	-	200	250	mA	Vin =24V
Positive electrode cable	12	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	12	-	-	AWG	
Enable PIN cable	NC	-	-	AWG	If the product has this feature
Fuse	-	30	-	A	Without fuse set inside
Output characteristics					
Efficiency	-	97.3	-	%	Vin =24V; Iout =10A
Output voltage	24	24.2	24.5	V	Vin =24V; Iout =10A
Regulator accuracy	-	±1	-	%	
Voltage regulation	-	±1	-	%	
Load Regulation	-	±1	-	%	
Overvoltage protection		NC		V	
Output current	0	-	10	A	
Overcurrent protection	15	20	25	A	Vin=24V
External capacitance	0	2000	10000	μF	
Output ripple and noise	-	230	300	mVp-p	Vin =18–36V; Iout=10A Bandwidth: 20 MHz;
Output voltage rise time	-	25	30	mS	
Boot delay time	-	50	80	mS	
Out voltage overshoot	-	2	3	%	Vin=24V ， 50%-75% Load step;
Over temperature protection	-	-	80	° C	Without over-temperature protectiong
Short circuit protection	-	-	-		
Positive electrode cable	16	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	16	-	-	AWG	

Safety and EMC features				
Anti-electric Strength	Input to Output	-	V	Leakage current ⩽ 3.5mA, 1min, no breakdown, no arcing
	Input to Shell	≥500	V	
	Output to Shell	≥500	V	
Insulation resistance	Input to Output	≥50	MΩ	Test voltage = 500V
	Input to Shell			
	Output to Shell			
Other characteristics				
Weight	≤ 550		g	
Package	wihte box			
MTBF	≥200,000		H	Vin =24V; Iout =10A
Switching frequency	220±10		KHz	

Characteristic Curves

Conditions: TA = 25° C (77° F), Vin = 24V, Vout =48V , unless otherwise specified.

Figure 1, Efficiency

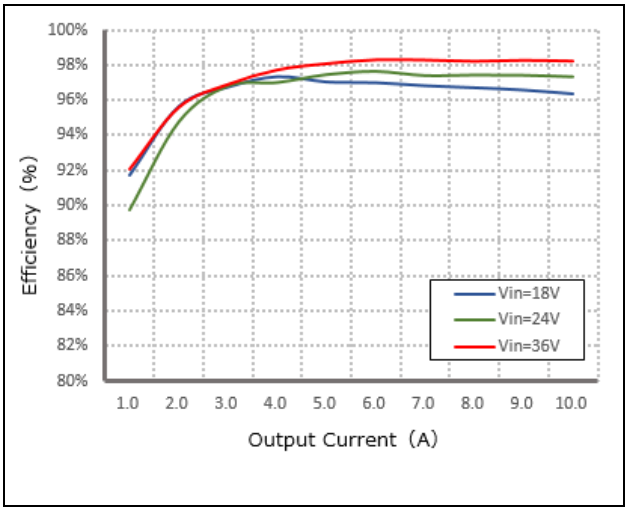


Figure 2, Power dissipation


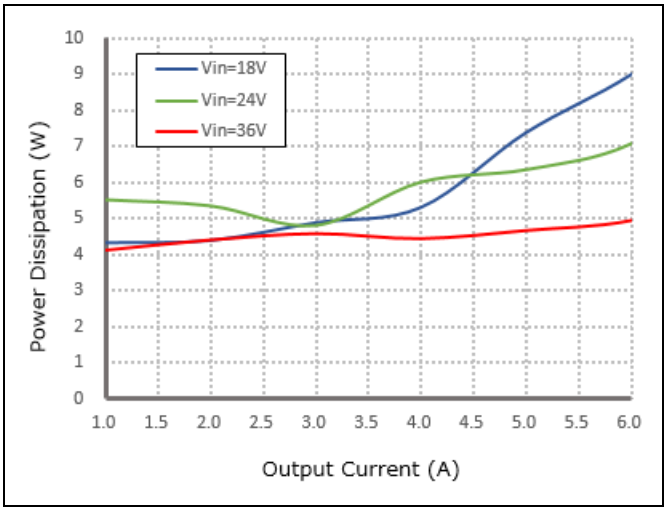


Figure 3, Input V-I Iout=10A

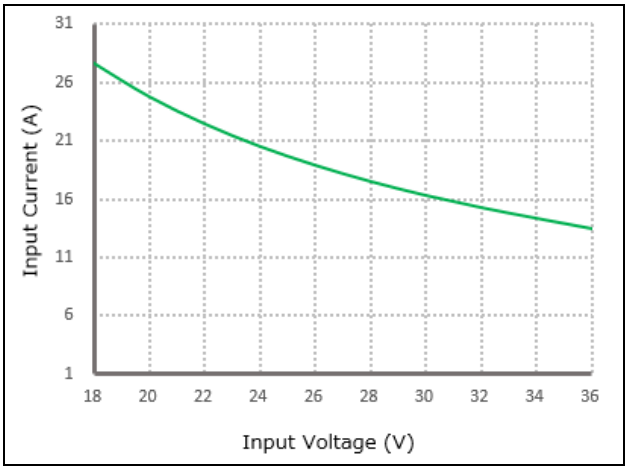

Typical Waveforms

Conditions: TA = 25° C (77° F), Vin = 24V, unless otherwise specified.

Figure 4, 25% - 50% load dynamic

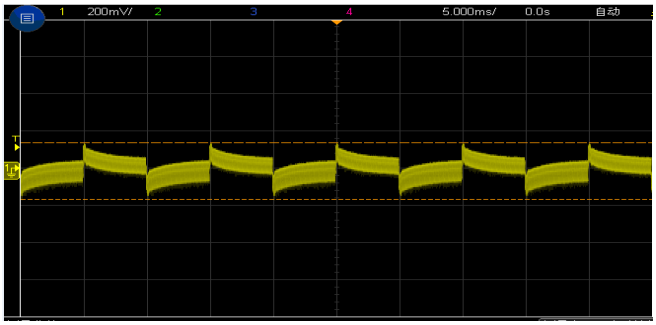


Figure 5, 50% - 75% load dynamic

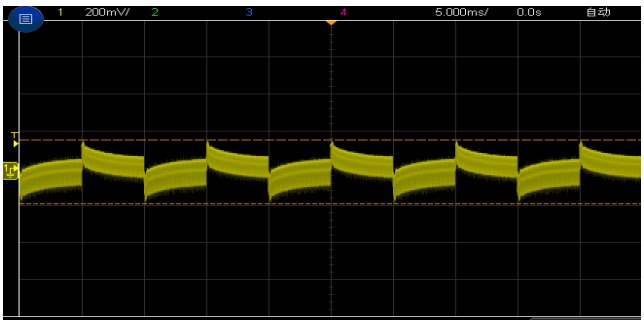


Figure 6, Output voltage established (Iout = 10A)


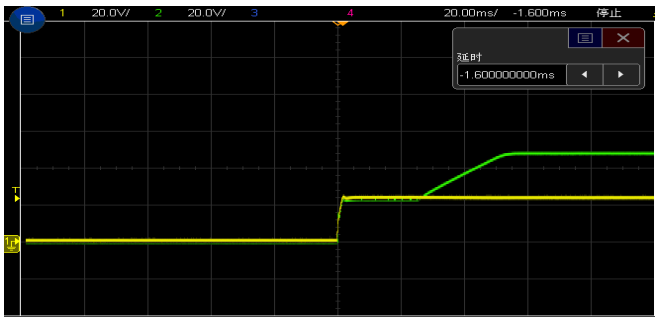


Figure 7, Output ripple & noise (Iout = 10A)

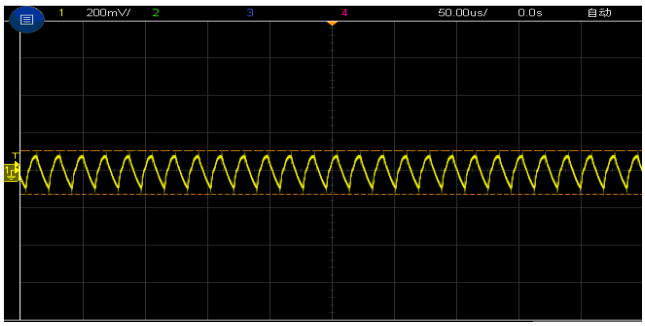


Feature Description


Remote On/Off (EN) (Optional)

Logic Enable	Low level (0 - 15Vdc)	High level (15 - 40Vdc)	Left open
Positive logic	Off	On	Off

Various circuits for driving the EN

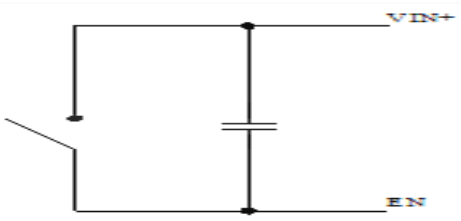

Simple control

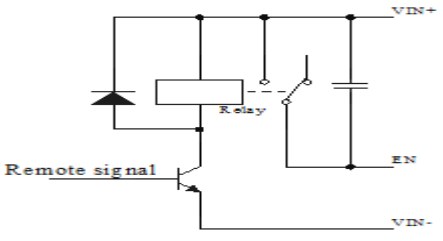

Transistor control

Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point , the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

Overtemperature Protection


A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis

Wiring Instructions


The input and output of this product are terminals. The user should ensure that the input and output wires and terminals are connected reliably , and pay attention to the wire diameter to meet the requirements of the power supply current. If the cable to be used is long, it needs Considering the voltage drop of the wire, if the voltage drop is too large, the voltage output at the load end may not meet the load demand. In this case, consider using a thicker wire diameter or reducing the length of the wire. Generally, if long wiring is required. Long line should be used on the side where the current is relatively small.

Thermal Consideration

Sufficient airflow should be provided to help ensure reliable operating of the SDS-24S4810.
Therefore, thermal components are mounted on the top surface of the SDS-24S4810 to dissipate heat to the surrounding environment by conduction, convection and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

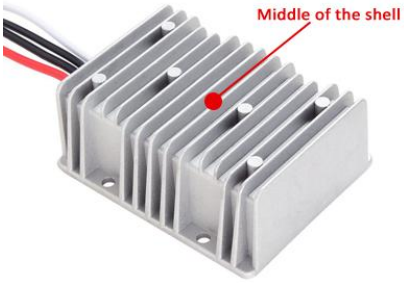

Dimension

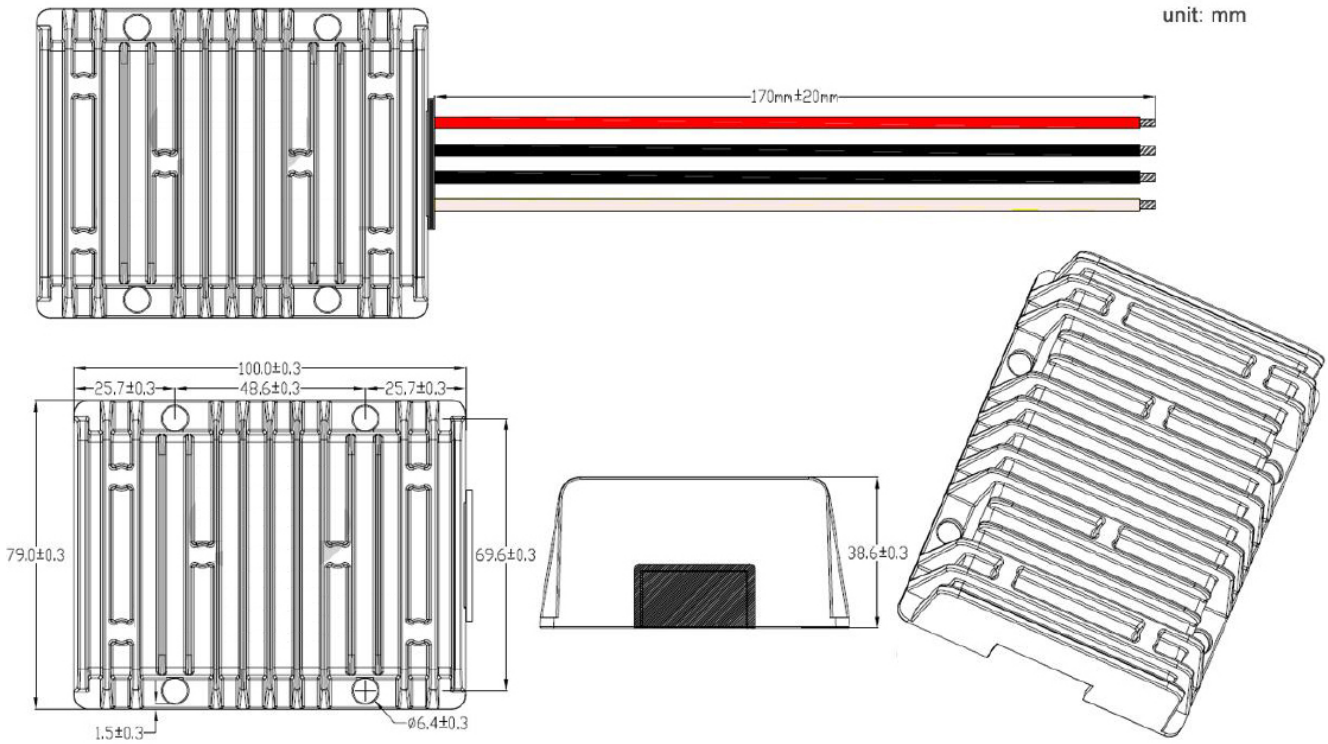
unit: mm
170mm±20mm
100.0±0.3
25.7±0.3
48.6±0.3
25.7±0.3
79.0±0.3
69.6±0.3
38.6±0.3
1.5±0.3
Ø6.4±0.3